


KS-5000 POUCH CUTTER

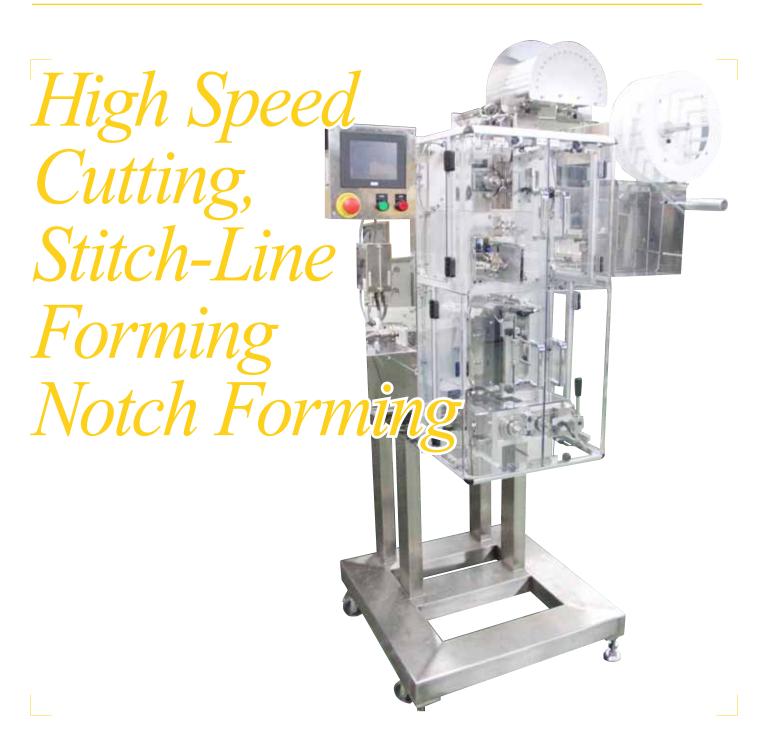

Features

- O High speed cutting / notching at 500pcs/minute by adopting rotary type cutter & notch blade
- O Rotary twin blade system is work material friendly, reducing pin-holes.
- Cutting and stitch-line forming by single blade achieving high preparation accuracy (Patent Pending 5393753)
- Easy operation by 5.7" color touch panel
- 30 types memory-bank corresponds to wide product types

PACK DISPENSING SYSTEM



Basic Specs

Capacity	Max. 500 pcs/minute (at single pouch length under 100mm) *Capacity is to reduce as pouch length becomes longer. *Capacity is subject to change based on pouch material and/or the contents.
Pouch Size	Width: 65 - 130mm Length: 45 - 230mm Thickness: Max. 20mm
Equipment Dimension	1868mm (W) x 1945mm (H) x 870mm (D)
Power	AC200/220V, 50/60Hz, 3 Phase, 2.5kVA
Weight	Approx. 300kg

1 Operation panel Overview 2 Non-contact pitch detector (PU-3) 3 Pitch feeder unit 4 Rotary notch unit ⑤ Rotary cut & stitch-line blade unit 6 Pull-up roller unit (1297.5)(870)7 Chute ® Pool box (Optional) 501.5 368 (6)(4) 1945~1980 $668.5 \sim 1703.5$ (700)200 30 370 $(677.7)^{+35}$ 450 (803)(5) (231)(740)785 138 740 (1868)



www.mitsuhashi-corp.co.jp info@mitsuhashi-corp.co.jp

株式会社 三橋製作所

☐ Head Office/ Factory

e/

1 Sekizan-cho Yamanouchi Ukyo-ku Kyoto 615-0082 Japan

TEL:+81-75-316-3300 FAX:+81-75-313-7595

MITSUHASHI CORPORATION

☐ Tokyo Office/Overseas Sales Division

Yoshikuni Komagata Bldg. 9F 2-4-11 Komagata Taitoh-ku Tokyo 111-0043 Japan

TEL:+81-3-3847-9751 FAX:+81-3-3847-9753

☐ Kyushu Office

Minamikindai Building 6F, 4-2-10 Hakataekiminami Hakata-ku Fukuoka 812-0016 Japan

TEL:+81-92-476-3800 FAX:+81-92-476-3801