

KD-4010 POUCH DISPENSER



Features

- Oconsecutive high-speed operation by **Rotary Cutter**
- Capacity: 280 sachets / minute
- O Sachet feeding & cutting synchronized with packing machine
- \bigcirc Sachet friendly smooth movement
- Easy operation by **5.7**″ **color touch panel**
- O Register up to **30 recipes**

PACK DISPENSING SYSTEM




Basic Specs

Dispensing Capacity	280 sachets / minute
Sachet Size	Width: 50 - 100mm Length: 50 - 120mm Thickness: Max. 10mm
Sachet Type	3 seam-seal / 4 seam-seal
Cutting Accuracy	$\geq \pm$ 1.5mm
Air Utility	0.5MPa 3ℓ/min. (ANR) Dry air
Operation Atmosphere	0°C - 40°C (Humidity under 80%RH)
Weight	Approx. 210kg

^{*} Note: This products is custom made.

Overview

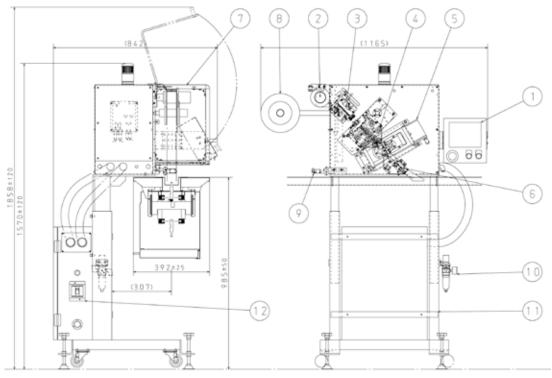

- ① Operation panel
- ② Top roll unit
- 3 Pitch detection unit
- 4 Belt feed unit
- ⑤ Cutter unit
- 6 Belt chute unit
- $\ensuremath{{\mathbb T}}$ Safety cover unit
- ® Roll unit
- 9 Noodle detection unit
- 10 Air system
- 11 Stand frame
- © Control box

MITSUHASHI CORPORATION

Lending "hands" to replace human hands.

https://www.mitsuhashi-corp.co.jp/en/

株式会社 三橋製作所

☐ Head Office/ Factory 1 Sekizan-cho Yamanouchi Ukyo-ku Kyoto

MITSUHASHI CORPORATION

615-0082 Japan TEL:+81-75-316-3300

FAX:+81-75-313-7595

☐ Tokyo Office/
Overseas Sales Division

Yoshikuni Komagata Bldg. 9F 2-4-11 Komagata Taitoh-ku Tokyo 111-0043 Japan

TEL:+81-3-3847-9751

FAX:+81-3-3847-9753

☐ Kyushu Office

Room 3 Bldg. D Office Parea Naka II 1-5-3 Naka

Onojo City Fukuoka 816-0906 Japan

TEL:+81-92-476-3800 FAX:+81-92-476-3801