


KS-2200 POUCH CUTTER

*Accurate
Perforation
Cutting*

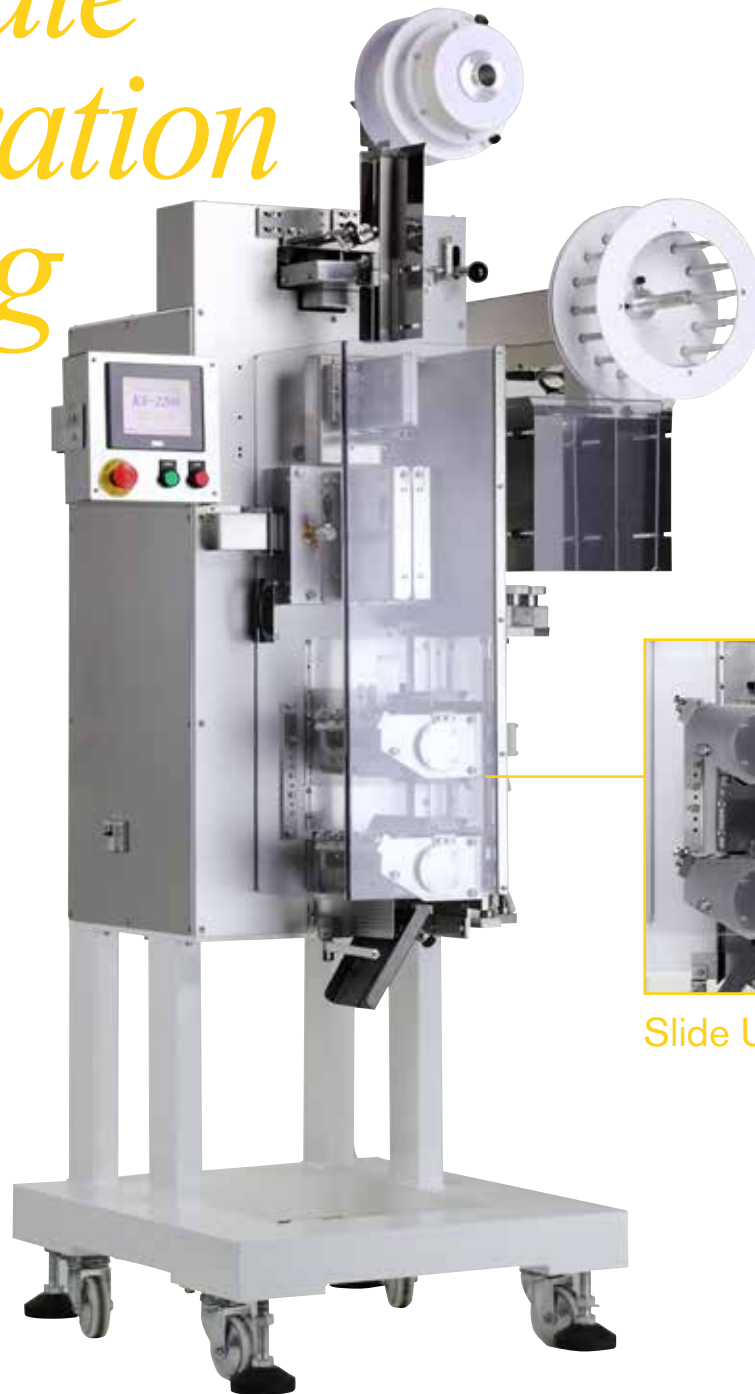

Slide Unit

Features


- Improved perforation and cutting accuracy thanks to the slider unit
- An easy to read 5.7-inch colored touch panel
- Freely adjustable notch, even during operation
- Adjustable angle for the cutter and perforation unit for angled cutting and perforation
- 50 different types of goods can be registered

Specifications

Equipment Capacity	30m/min (MAX) ※ With 100mm Length (Single pouches) 300pcs/min (MAX)
Pouch Dimensions	Width 65-120mm, Length 45-180mm, Thickness 20mm
Device Dimensions	1780mm(W) × 2136mm(H) × 800mm(D)
Power Supply	3 φ AC200 50/60 Hz 2.5Kva
Power Supply	Approx.210kg

*The maximum capacity will vary depending on the conditions of the packaging materials and contents.

Drawing

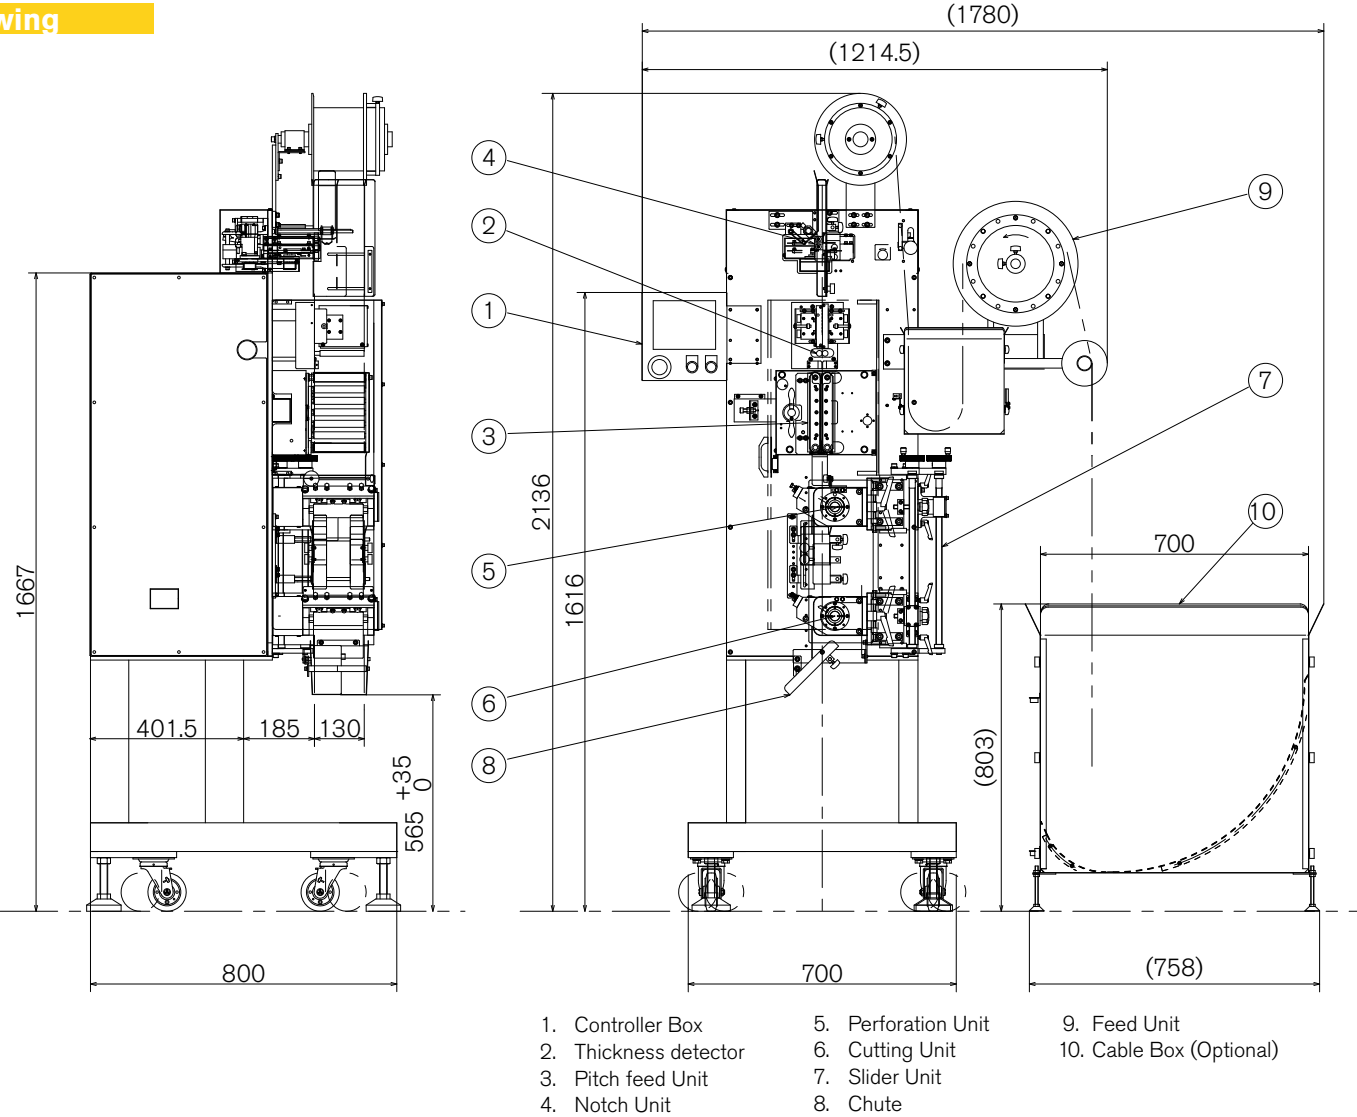

株式会社 三橋製作所

MITSUHASHI CORPORATION



Lending “hands” to replace human hands.

<https://www.mitsubishi-corp.co.jp/en/>

- ☐ Head Office/ Factory
1 Sekizan-cho Yamanouchi Ukyo-ku Kyoto
615-0082 Japan
TEL:+81-75-316-3300 FAX:+81-75-313-7595
- ☐ Tokyo Office/ Overseas Sales Division
Yoshikuni Komagata Bldg. 9F 2-4-11 Komagata
Taitoh-ku Tokyo 111-0043 Japan
TEL:+81-3-3847-9751 FAX:+81-3-3847-9753
- ☐ Kyushu Office
Room 3 Bldg. D Office Pareia Naka II 1-5-3 Naka
Onojo City Fukuoka 816-0906 Japan
TEL:+81-92-476-3800 FAX:+81-92-476-3801